


**AVANT AIR+**  
Screening Audiometer

## PC-Based Screening Audiometer

Ideal Audiometer for Traveling.  
Use for Community Screenings  
Where Only Air Thresholds Are  
Needed.

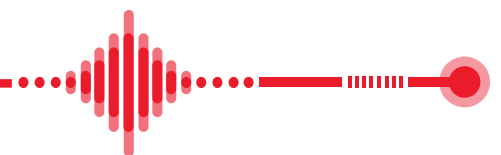

# AVANT AIR+

## Technical Specs

**Standards:** Screening Audiometer As Per ANSI S3.6-2018, IEC 60645-1:2012, Type 4; Tone Audiometry

**Outputs:** DD65v2 Headphones

**Frequency Range:** Air: 125 Hz – 8 kHz

**Max Output:** Air Conduction: 100 dB HL For Mid-Range Frequencies

**Attenuation:** 1 dB Step Or 5 dB Step, User Selectable

**Compatible with:** NOAH™, TIMS®, Blueprint OMS And Sycle

**Power Requirements:** USB-Powered

**Dimensions:** Approx. 12 cm x 12 cm x 3 cm (L x W x H)  
Approx. 5" x 5" x 1" (L x W x H)

**Weight:** < 500 g < 1 lb

**Standard Accessories:** DD65v2 Headphones, Patient Response Switch, Talkback Microphone, Operator Mic / Monitor Headset, Software & Manuals, Carrying Case

**Optional Accessories:** DD450 Headphones, DD45 Headphones Or Insert Earphones

### MedRx Minimum Computer Specs:

Windows® PC Compatible Computer, Intel™ i5 Dual Core, 2.0 GHz Or Better. 4 GB RAM. 20 GB Free Hard Drive Space. Available 2.0 USB Port. Windows 7, 8 Or 10 Professional (32 Or 64-Bit).

## AVANT AIR+ Features

- Air Threshold Testing
- Automatic Air Audiometry Testing
- 125 Hz - 8 kHz
- Small Footprint:  
Approx. 12 cm x 12 cm x 3 cm (L x W x H)
- PC-based via USB Connection
- HID device - True Plug and Play
- NOAH™, TIMS®, Blueprint OMS and Sycle Compatible

# MedRx®

Good Things Come in Small Packages

### MedRx International

MAICO Diagnostics GmbH

Sickingenstr. 70-71

10553 Berlin, Germany

Phone: +49 30 70 71 46 50

Fax: +49 30 70 71 46 99

Email: medrx-sales@maico.biz

www.medrx-diagnostics.com

Australian Distributor

**SONIC**  
EQUIPMENT

1800 639 263  
info@soniceq.com  
soniceq.com



AVANT AIR+ comes standard with the DD65v2 Headphones.

